



LED Flood Lights IP66

Cree
Bridgelux
Osram
Sanan

Meanwell
Inventronics
Sosen
LiFud

IP66
150 Lm / Watt
20W to 200W
PF >0.95
Volts 90-305VAC



FLA SERIES LED FLOOD LIGHTS

CrystaLED FLA Series of Industrial Type **IP66 LED Flood Lights** are suitable for Area Lighting, Security Lighting, Small Sports Fields & CCTV applications to achieve HD results with improved color rendering & excellent view of the places for CCT Cameras for face & name plate recognition

Suitable for Wall, Surface & Standard U-Shaped Bracket Mounting. Pole & T-Channel Mounting
Optional Special Brackets available on request based on drawing & mounting brackets material



Chips: Cree/Bridgelux/Sanan/Osram
Drivers: Meanwell/Inventronics/Sosen/LiFud
Material: Die Cast Aluminium
Paint: Powder Coated Paint
Gaskets: Silicone
IP Rating: IP66
Motion Sensor PIR, Remote Control, Photocell & Timers subject of extra cost

Watts: 20W, 30W, 50W, 100W, 150W & 200W
150 Lm/ Watt
60,000 hours life
P. Factor > 0.95 to 0.98
AC Voltages: 90-305VAC, 50/60 Hz
DC Voltages: 12 / 24 / 48VDC (on extra cost & change in design parameters)
Luminous Angles: 15°/30°/60°/90°/120°


CrystaLED High Performance LED Flood Lights are also available on request for any specific wattage or nearest to the above mentioned wattages, voltages and color temperatures like 3000K, 6500K. Special manufacturing & technical support services are available to provide you the proper solutions against other technical specifications and customised solution for your different applications

LED Flood Lights IP66


Wattages
Color Temp
Catalogue Number
Product Weights

Cat. Number	Wattage	Lumens	Ingress Protection	Color Temp.	Voltages	Temperature	Weight
CRLED-FLA-20W-CW-6K	20W	3000	IP66	6000K	90-305VAC	-40 to+55	2.30 Kgs
CRLED-FLA-20W-NW-5K	20W	3000	IP66	5000K	90-305VAC	-40 to+55	2.30 Kgs
CRLED-FLA-20W-WW-4K	20W	3000	IP66	4000K	90-305VAC	-40 to+55	2.30 Kgs
CRLED-FLA-30W-CW-6K	30W	4500	IP66	6000K	90-305VAC	-40 to+55	2.50 Kgs
CRLED-FLA-30W-NW-5K	30W	4500	IP66	5000K	90-305VAC	-40 to+55	2.50 Kgs
CRLED-FLA-30W-WW-4K	30W	4500	IP66	4000K	90-305VAC	-40 to+55	2.50 Kgs
CRLED-FLA-50W-CW-6K	50W	7500	IP66	6000K	90-305VAC	-40 to+55	2.57 Kgs
CRLED-FLA-50W-NW-5K	50W	7500	IP66	5000K	90-305VAC	-40 to+55	2.57 Kgs
CRLED-FLA-50W-WW-4K	50W	7500	IP66	4000K	90-305VAC	-40 to+55	2.57 Kgs
CRLED-FLA-100W-CW-6K	100W	15000	IP66	6000K	90-305VAC	-40 to+55	3.25 Kgs
CRLED-FLA-100W-NW-5K	100W	15000	IP66	5000K	90-305VAC	-40 to+55	3.25 Kgs
CRLED-FLA-100W-WW-4K	100W	15000	IP66	4000K	90-305VAC	-40 to+55	3.25 Kgs
CRLED-FLA-150W-CW-6K	150W	22500	IP66	6000K	90-305VAC	-40 to+55	3.55 Kgs
CRLED-FLA-150W-NW-5K	150W	22500	IP66	5000K	90-305VAC	-40 to+55	3.55 Kgs
CRLED-FLA-150W-WW-4K	150W	22500	IP66	4000K	90-305VAC	-40 to+55	3.55 Kgs
CRLED-FLA-200W-CW-6K	200W	30000	IP66	6000K	90-305VAC	-40 to+55	3.56 Kgs
CRLED-FLA-200W-NW-5K	200W	30000	IP66	5000K	90-305VAC	-40 to+55	3.56 Kgs
CRLED-FLA-200W-WW-4K	200W	30000	IP66	4000K	90-305VAC	-40 to+55	3.56 Kgs


Dimensions

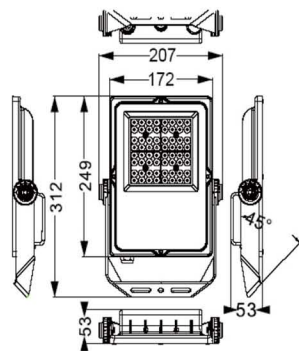

20W, 30W & 50W



70W & 80W

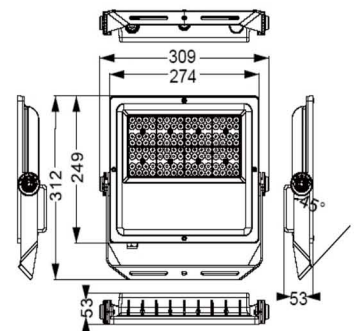

100W, 120W & 150W