

# LED PANEL LIGHTS

## MULTIFUNCTIONAL


LED Slim & Smart Panel Light  
 Plastic Housing  
 The 3-CCT color temperature switch for 3000K/4000K/6000K  
 Optional Motion Sensors available  
 Flexible Recessed Mountings & Surface Mounting  
 Adjustable on different hole dia sizes or cut outs

### FEATURES

- Ingress Protection: IP20.
- Beam Angle: 120 degree.
- Certified: CE RoHS
- Installation: recessed with clips & surface without clips



Dimensions (mm)	Dia ø	H (mm)	Cut Size
Size A (9W)	155	20	70-100 mm
Size B (12W)	175	20	70-120 mm
Size C (18W)	225	20	70-170 mm
Size D (24W)	300	20	70-240 mm

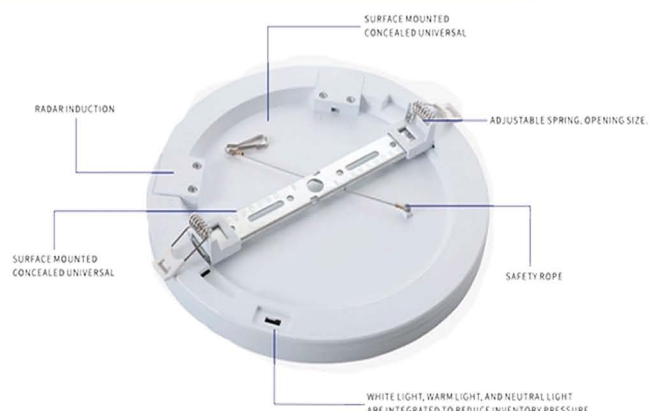

### MEASUREMENTS

Cat. Number	Wattage	Lumens	Ingress Protection	Color Temp.	Voltages	Temperature	Weight
CRLED-DLA-RSR-9W-CCT	9W	630	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.22
CRLED-DLA-RSR-12W-CCT	12W	960	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.38
CRLED-DLA-RSR-18W-CCT	18W	1620	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.82
CRLED-DLA-RSR-24W-CCT	24W	2160	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.97
CRLED-DLA-SSR-9W-CCT	9W	630	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.22
CRLED-DLA-SSR-12W-CCT	12W	960	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.38
CRLED-DLA-SSR-18W-CCT	18W	1620	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.82
CRLED-DLA-SSR-24W-CCT	24W	2160	IP20	3K/4K/6K	100-240VAC	-20 to+45	0.97

### SURFACE & Recessed MOUNTED

