

LED Street Lights IP66

Cree
Bridgelux
Osram
Sanan

Meanwell
Inventronics
Sosen
LiFud

IP66
130 Lm / Watt
50W to 200W
PF >0.95
Volts 90-305VAC



STA SERIES LED STREET LIGHTS

CrystaLED STA Series of Industrial Type **IP66 LED Street Lights** are suitable for Street Lighting, Highway Lighting, Motorway Lighting applications to achieve HD results with improved color rendering & excellent view of the Roads for CCT Cameras for face & name plate recognition

Optional Special Brackets available on request based on Dia, Drawings & mounting brackets material



Chips: Cree/Bridgelux/Sanan/Osram
Drivers: Meanwell/Inventronics/Sosen/LiFud
Material: Die Cast Aluminium
Paint: Powder Coated Paint
Gaskets: Silicone
IP Rating: IP66
Motion Sensor PIR, Remote Control, Photocell & Timers subject of extra cost

Watts: 50W, 80W, 100W, 120W, 150W & 200W
130 Lm/ Watt
60,000 hours life
P. Factor > 0.95 to 0.98
AC Voltages: 90-305VAC, 50/60 Hz
DC Voltages: 12 / 24 / 48VDC (on extra cost & change in design parameters)
Luminous Angles: 15°/30°/60°/90°/120°


CrystaLED High Performance LED Street Lights are also available on request for any specific wattage or nearest to the above mentioned wattages, voltages and color temperatures like 3000K, 6500K. Special manufacturing & technical support services are available to provide you the proper solutions against other technical specifications & customised solution for your different applications

LED Street Lights IP66


Wattages
Color Temp
Catalogue Number
Product Weights

Cat. Number	Wattage	Lumens	IP Rating	Color Temp	Voltages	Temperature	Weight
CRLED-STA-50W-CW	50W	6500	IP66	6000K	220-240 VAC	-40 to+55	3Kgs
CRLED-STA-50W-WW	50W	6500	IP66	4000K	220-240 VAC	-40 to+55	3Kgs
CRLED-STA-80W-CW	80W	10400	IP66	6000K	220-240 VAC	-40 to+55	4Kgs
CRLED-STA-80W-WW	80W	10400	IP66	4000K	220-240 VAC	-40 to+55	4Kgs
CRLED-STA-100W-CW	100W	13000	IP66	6000K	220-240 VAC	-40 to+55	4Kgs
CRLED-STA-100W-WW	100W	13000	IP66	4000K	220-240 VAC	-40 to+55	4Kgs
CRLED-STA-120W-CW	120W	15600	IP66	6000K	220-240 VAC	-40 to+55	4Kgs
CRLED-STA-120W-WW	120W	15600	IP66	4000K	220-240 VAC	-40 to+55	4Kgs
CRLED-STA-150W-CW	150W	19500	IP66	6000K	220-240 VAC	-40 to+55	5.2Kgs
CRLED-STA-150W-WW	150W	19500	IP66	4000K	220-240 VAC	-40 to+55	5.2Kgs
CRLED-STA-200W-CW	200W	26000	IP66	6000K	220-240 VAC	-40 to+55	5.2Kgs
CRLED-STA-200W-WW	200W	26000	IP66	4000K	220-240 VAC	-40 to+55	5.2Kgs

Dimensions

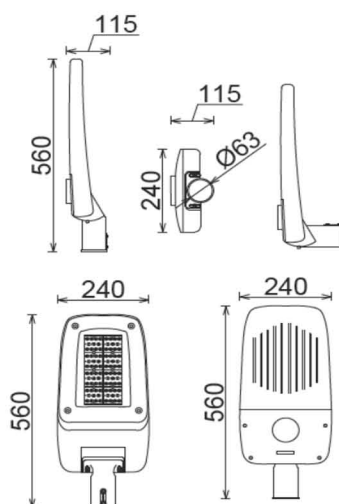

50W, 80W & 100W

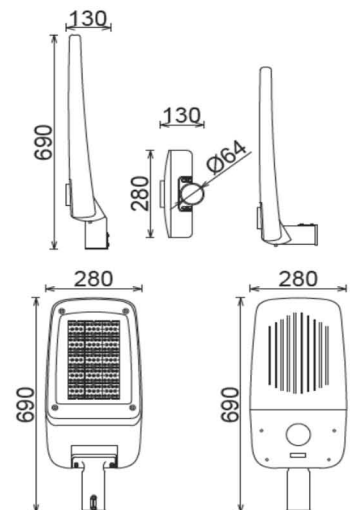

120W, 150W & 200W