

FLTP SERIES



FLTP Series High Performance LED Flood Lights IP66

Cree
Bridgelux
Osram
Sanan


Meanwell
Inventronics
Sosen
LiFud

IP66
128 Lm / Watt
50W to 200W
PF >0.95
Volts 90-305VAC



CrystaLED FLTP Series of High Performance **LED Flood Lights IP66** are suitable for Large Area Lighting, Large Sports Fields, Security Lighting & excellent view of the places for CCT Cameras for Video Broadcasting of live sports events.

Suitable for Wall, Surface & Standard U-Shaped Bracket Mounting. Pole & T-Channel Mounting
Optional Special Brackets available on request based on drawing & mounting brackets material



Chips: Cree/Bridgelux/Sanan/Osram
 Drivers: Meanwell/Inventronics/Sosen/LiFud
 Material: Die Cast Aluminium
 Paint: Powder Coated Paint
 Gaskets: Silicone
 IP Rating: IP66
 Motion Sensor PIR, Remote Control, Photocell & Timers subject of extra cost

Watts: 50W, 100W, 150W, 180W & 200W
 128 Lm/ Watt
 60,000 hours life
 P. Factor > 0.95 to 0.98
 AC Voltages: 90-305VAC, 50/60 Hz
 DC Voltages: 12 / 24 / 48VDC (on extra cost & change in design parameters)
 Luminous Angles: 15°/30°/60°/90°/120°


CrystaLED FLTP Series of High Performance LED Flood Lights are also available on request for any specific wattage or nearest to the above mentioned wattages, voltages and color temperatures like 3000K, 6500K. Special manufacturing & technical support services are available to provide you the proper solutions against other technical specifications and customised solution for your different applications

Wattages
Color Temp
Catalogue Number
Product Weights

FLTP Series High Performance LED Flood Lights IP66

Cat. Number	Wattage	Lumens	Ingress Protection	Color Temp.	Voltages	Temperature
CRLED-FLTP-50W-6K	50W	6400	IP66	6000K	90-305VAC	-40 to+55
CRLED-FLTP-50W-5K	50W	6400	IP66	5000K	90-305VAC	-40 to+55
CRLED-FLTP-50W-3K	50W	6400	IP66	4000K	90-305VAC	-40 to+55
CRLED-FLTP-100W-6K	100W	12800	IP66	6000K	90-305VAC	-40 to+55
CRLED-FLTP-100W-5K	100W	12800	IP66	5000K	90-305VAC	-40 to+55
CRLED-FLTP-100W-3K	100W	12800	IP66	4000K	90-305VAC	-40 to+55
CRLED-FLTP-150W-6K	150W	19200	IP66	6000K	90-305VAC	-40 to+55
CRLED-FLTP-150W-5K	150W	19200	IP66	5000K	90-305VAC	-40 to+55
CRLED-FLTP-150W-4K	150W	19200	IP66	4000K	90-305VAC	-40 to+55
CRLED-FLTP-180W-6K	180W	23040	IP66	6000K	90-305VAC	-40 to+55
CRLED-FLTP-180W-5K	180W	23040	IP66	5000K	90-305VAC	-40 to+55
CRLED-FLTP-180W-4K	180W	23040	IP66	4000K	90-305VAC	-40 to+55
CRLED-FLTP-200W-6K	200W	25600	IP66	6000K	90-305VAC	-40 to+55
CRLED-FLTP-200W-5K	200W	25600	IP66	5000K	90-305VAC	-40 to+55
CRLED-FLTP-200W-4K	200W	25600	IP66	4000K	90-305VAC	-40 to+55

Dimensions

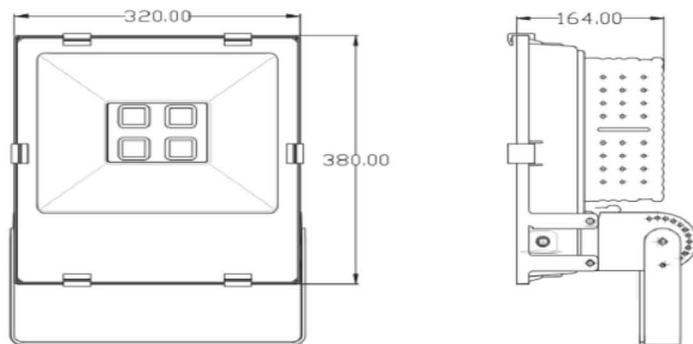

Dimensions (mm)	L (mm)	H (mm)	W (mm)
Size A (100W-150W)	364	298	187
Size B (180W-200W)	465	344	197