



**BPL SERIES**

**LED Panel Light**  
Backlit Panel Technology



Backlit Panel Light  
1CCT & 3CCT  
36W & 40W  
130-170 Lm/Watt  
6500K 6000K  
5000K 4000K 3000K  
Life: 30,000 Hours


Amb Temp: -25-60°C  
CRI: Ra>80  
Isolated Flicker  
Free Driver  
SPD Optional  
Two Years  
Extended Warranty

Recessed Standard  
Pendant Optional  
& Surface Optional  
PF >0.96  
200-240V 50/60Hz  
CE & RoHS  
TUV EMC & TUV LVD  
EN61000-4-2 EN61547

Recessed Type 1200mmx600mm




Recessed 600mmx600mm

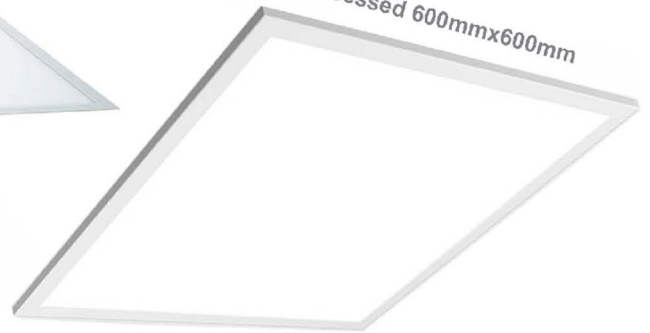


3 CCT Switch

Pendant Type

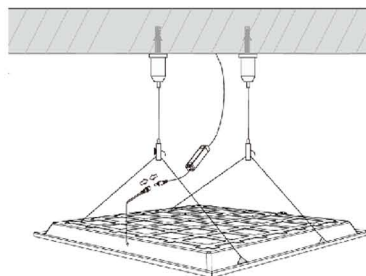

Surface Type

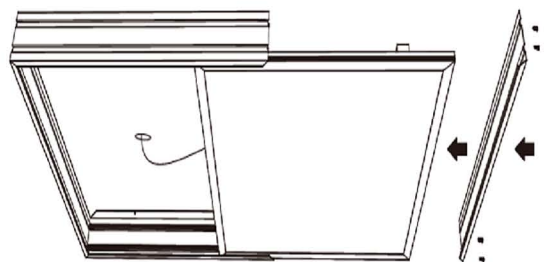

# BPL SERIES

Wattages  
Color Temp  
Catalogue Number  
Product Weights

## LED Panel Light

Backlit Panel Technology  
600x600mm & 600x1200mm  
200mmx600mm

Cat. Number	Watt	Lumens	Lm/W	IP Rating	Color Temp.	Size	Voltages	Temperature	Weight
CRLED-PL-36W-3K	36W	4680	130lm/W	IP20	3000K	600x600mm	200-240VAC	-20 to+60	1.62
CRLED-PL-36W-4K	36W	4680	130lm/W	IP20	4000K	600x600mm	200-240VAC	-20 to+60	1.62
CRLED-PL-36W-6K	36W	4680	130lm/W	IP20	6000K	600x600mm	200-240VAC	-20 to+60	1.62
CRLED-PL-15W-4K	15W	1950	130lm/W	IP20	4000K	200x600mm	200-240VAC	-20 to+60	1
CRLED-PL-36W-CCT	36W	4680	130lm/W	IP20	3000K/4000/6000K	600x600mm	200-240VAC	-20 to+40	2
CRLED-PL-36W-CCT	36W	4680	130lm/W	IP20	3000K/4000/6000K	600x600mm	200-240VAC	-20 to+40	2
CRLED-PL-36W-CCT	36W	4680	130lm/W	IP20	3000K/4000/6000K	600x600mm	200-240VAC	-20 to+40	2
CRLED-PL-25W-CCT	25W	3750	150lm/W	IP20	3000K/4000/6000K	600x600mm	200-240VAC	-20 to+40	2
CRLED-PL-25W-CCT	25W	3750	150lm/W	IP20	3000K/4000/6000K	600x600mm	200-240VAC	-20 to+40	2
CRLED-PL-25W-CCT	25W	3750	150lm/W	IP20	3000K/4000/6000K	600x600mm	200-240VAC	-20 to+40	2
CRLED-PL-30W-3K-65	30W	4200	140lm/W	IP65	3000K	600x600mm	200-240VAC	-20 to+45	2
CRLED-PL-30W-4K-65	30W	4200	140lm/W	IP65	4000K	600x600mm	200-240VAC	-20 to+45	2
CRLED-PL-30W-6K-65	30W	4200	140lm/W	IP65	4000K	600x600mm	200-240VAC	-20 to+45	2
CRLED-PL-64W-3K	64W	7680	120lm/W	IP20	3000K	1195x600mm	200-240VAC	-20 to+40	4
CRLED-PL-64W-4K	64W	7680	120lm/W	IP20	4000K	1195x600mm	200-240VAC	-20 to+40	4
CRLED-PL-64W-6K	64W	7680	120lm/W	IP20	6000K	1195x600mm	200-240VAC	-20 to+40	4

### Dimensions

Dimensions (mm)	L (mm)	W (mm)	H (mm)
15W LED	200mm	600mm	30mm
36W LED	600mm	600mm	30mm
40W LED	600mm	600mm	30mm
64W LED	1195mm	600mm	30mm
64W LED	1195mm	600mm	30mm